


## PARALLEL LATHE FOLLOW CE500X2000

Ref: CE500VX2000 FOLLOW

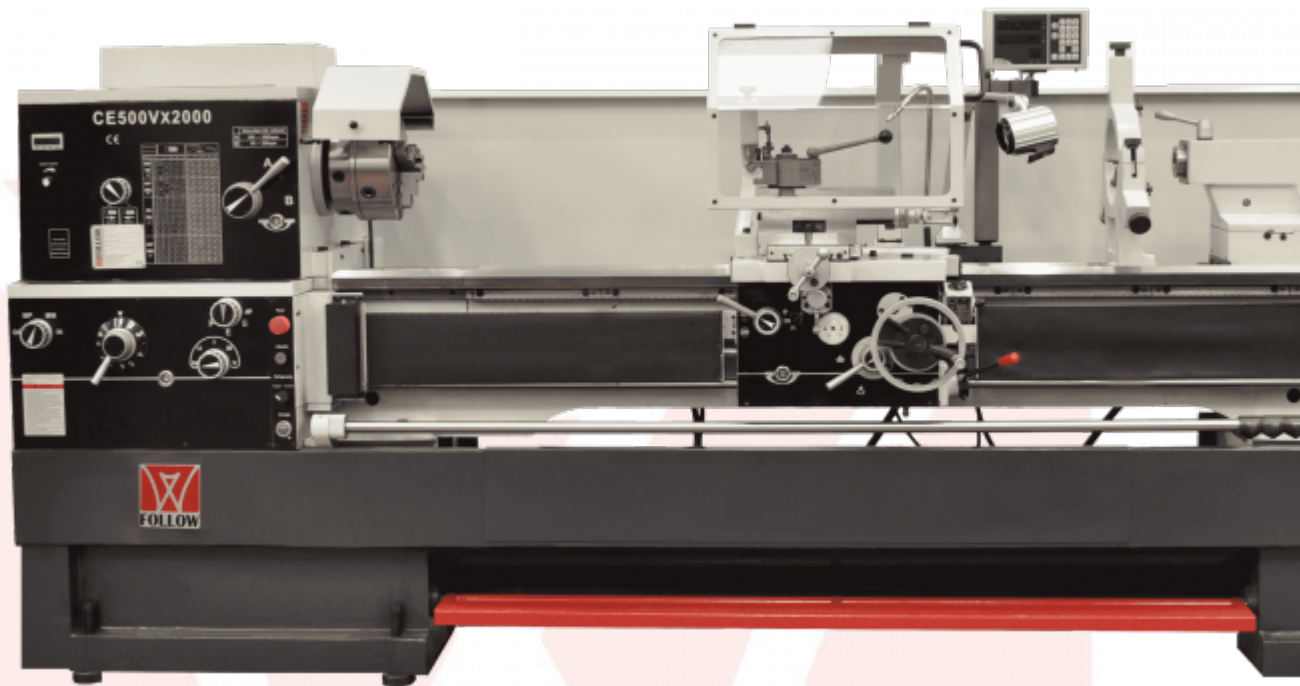

## Tech specs

<b>Brand</b>	FOLLOW
<b>Height of points</b>	250 mm
<b>Distance between centers</b>	2000
<b>Swing over bed</b>	500
<b>Swing over ram</b>	740
<b>Swing over carriage</b>	340
<b>Bed width</b>	340
<b>Length gap</b>	310
<b>width charriot</b>	130
<b>Main spindle hole</b>	80
<b>Number of speed ranges of spindle</b>	25-1800
<b>Spindle nose</b>	CAMLOCK N°8
<b>Main spindle morse taper</b>	7 CM/MT
<b>Longitudinal feed</b>	0,041-2,46
<b>Cross feed</b>	0,02-1,25
<b>Metric pitch</b>	(24) 0,5-20 mm
<b>Pasos Whitworth</b>	1-5/8-72
<b>Modular pitch</b>	(20) 0,25-10 m.p
<b>Diametral pitch</b>	(45) 96-31/4 d.p
<b>Master spindle pitch</b>	Ø/ 40 x 12DP
<b>Cross carriage travel</b>	290
<b>Carriage travel</b>	135
<b>Max. dimension of tool</b>	25x25
<b>Tailstock morse taper</b>	5 CM/MT
<b>Power of the main motor</b>	5,5/7,5
<b>Power of motor pump</b>	0,09/0,12
<b>Electrical voltage</b>	230-400/50-60Hz
<b>Dimensions (length x width x height)</b>	3350x1150x1600
<b>Net weight</b>	3300
<b>Quill diameter</b>	75
<b>Quill travel</b>	150



## Standard equipment

---

- 3 jaw universal chuck Ø250mmç
- 4 independant jaw chuck Ø320mm
- Faceplate Ø 410mm
- Drive plate Ø275mm
- Display FAGOR X,Y
- Live center
- 2 dead centers CM3
- Emergency brake
- Steady rest
- Live center
- Quick change tool post with 4 tool holder
- Coolant system
- Work light
- Tool box
- Certificate CE

## Images

---

